

α


Getting Started

Be sure to turn off rack power before starting installation.


AlphaPro uses a 16-pin Doepfer standard power cable. Please take care to ensure that the cable is fitted the correct way round.

If using the supplied power cable, the plastic lug on the top of the cable connector should fit into the slot in the plastic shroud around the PCB connector.

As an additional check, the red wire on the cable should be at the end of the connector marked with a triangle.

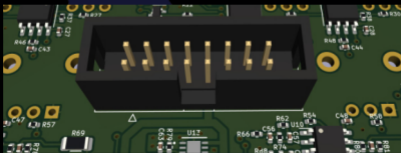

AlphaPro Channel

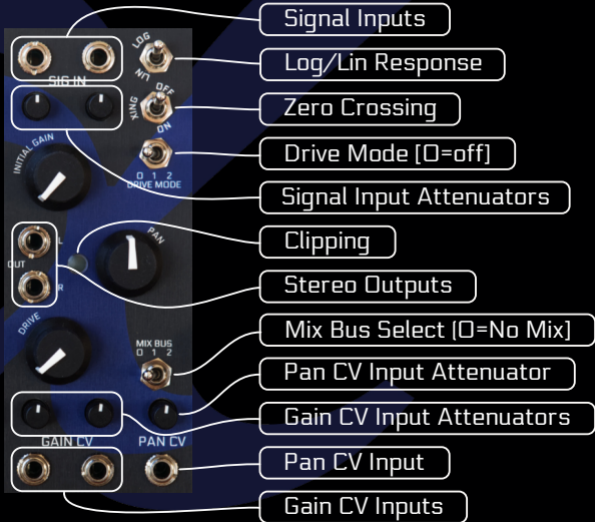

AlphaPro - Four Channel VCA Mixer with Overdrive

Technical Specifications

Width: 38HP

Power Requirements:

+12v @ 250mA

-12v @ 100mA

+5v @ 0mA

Inputs:

Signal (Zero attenuation): $\pm 5\text{v}$ nominal, $\pm 12\text{v}$ max

Gain CV (Zero attenuation): 0-5v nominal

Pan CV (Zero attenuation): $\pm 5\text{v}$ nominal

Outputs:

Stereo: $\pm 5\text{v}$ nominal, $\pm 10\text{v}$ max

With Drive Modes 1&2 outputs are normalised to around $\pm 5\text{v}$ max.

For further details and documentation
please visit www.blaknblu.com

Designed by BlaknBlu Ltd. Cambridge, United Kingdom

